


RTV *Utility Vehicle*

RTV900



SPECIFICATIONS

Model		General Purpose	Recreational	Worksite	Worksite Utility	Turf Utility
Engine	Make	HP(kW)	KUBOTA D902-E-UV			
	Type	HP(kW)	3 cylinders, 4-cycle, diesel, OHV			
	Displacement	cu. in. (cc)	54.8 (898)			
	Horsepower	HP (kW)/rpm	21.6 (16.1) @3200			
Fuel tank capacity		U.S. Gal. (L)	7.4 (28)			
Transmission			Variable hydro transmission (VHT)			
Max. traveling speed		mph (km/h)	25 (40)			
Wheels, drive system			4, 4WD w/2WD selection			
Differential lock			Standard; foot operated with mechanical holder			
Gear selection			Hi-Med-Lo range forward, neutral, reverse			
Brakes	Front/Rear		Wet-disc brake			
	Parking		Rear wheel, hand lever			
Steering			Hydrostatic power			
Suspension	Front		Independent, Mac-Pherson strut-type			
	Rear		Semi-independent, DeDion axel w/leaf springs and shock absorbers			

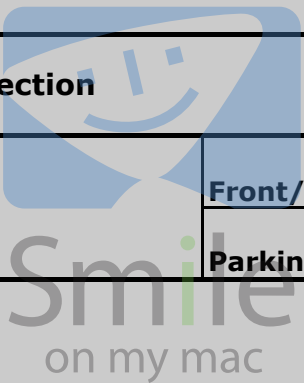

RTV *Utility Vehicle*

RTV900



SPECIFICATIONS

Model		General Purpose	Recreational	Worksite	Worksite Utility	Turf Utility
Dimensions	Length	in. (mm)	117.7 (2990)	119.3 (3030)		
	Width	in. (mm)	59.8 (1520)			
	Height, overall	in. (mm)	79.3 (2015)			
	Front tread centers	in. (mm)	45.3 (1150)			46.5 (1180)
	Rear tread centers	in. (mm)	46.5 (1180)			47.6 (1210)
	Wheelbase	in. (mm)	77.4 (1965)			
	Ground clearance-front axel	in. (mm)	8.3 (210)			
	Ground clearance-rear axel	in. (mm)	7.5 (190)			
	Turning diameter	in. (mm)	25.6 (7.8)			
Max. rolling weight (Towing capability)	lbs. (kg)	1300 (590)				
Payload capacity	lbs. (kg)	1653 (750)			1576 (715)	
Weight	lbs. (kg)	1863 (845)	1907 (865)	1918 (870)	1984 (900)	1995 (905)
Cargo Bed	Width	in. (mm)	52 (1320)			
	Length	in. (mm)	46.7 (1180)			
	Depth	in. (mm)	11.4 (290)			
	Volume	cu. Ft. (m ³)	16 (0.455)			
	Bed Height (Unloaded)	in. (mm)	31.5 (800)			
	Cargo bed loaded	lbs. (kg)	1102 (500)			
Sound level, operator ear	db. (A)	87 @ Max. engine speed w/ no load			89 @ Max. engine speed w/ no load	

RTV *Utility Vehicle*

RTV900



SPECIFICATIONS

Model		General Purpose	Recreational	Worksite	Worksite Utility	Turf Utility
Tire Options	Front	25x10-12 Knobby, 6PLY	25x10-12 ATV, 6PLY	25x10-12 HDWS, 6PLY	25x10-12 HDWS, 6PLY	25x12-12 Turf, 6PLY
		25x10-12 HDWS, 6PLY	25x10-12 HDWS, 6PLY	25x10-12 ATV, 6PLY	-	-
		25x12-12 Turf, 6PLY	-	-	-	-
	Rear	25x10-12 Knobby, 6PLY	25x11-12 ATV, 6PLY	25x10-12 HDWS, 6PLY	25x10-12 HDWS, 6PLY	25x12-12 Turf, 6PLY
		25x10-12 HDWS, 6PLY	25x10-12 HDWS, 6PLY	25x11-12 ATV, 6PLY	-	-
		25x12-12 Turf, 6PLY	-	-	-	-
Front guard		-	Std.	Std.	Std.	Std.
Body color		Orange	Camo	Orange	Orange	Orange
Hydraulic bed lift		-	Std. (*)	Std.	Std.	Std.
Hydraulic Utility Valve		-	-	-	Std.	Std.
Speedometer		-	Std.	-	Std.	Std.

The company reserves the right to change the above specifications without notice. This information is for descriptive purpose only. Please contact your local Kubota Dealer for warranty information.

For your safety KUBOTA strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. For complete operational information, the operator's manual should be consulted. For off-highway

The values in "Ground clearance" and "Weight" are those of the machine equipped with the tires in the table above. (*) The hydraulic bed lift on the RTV900R is standard on units starting with serial number 31112 and above.

